


**WINDING IN 7 SECTIONS**



**AMORPHOUS CORE 0,023**

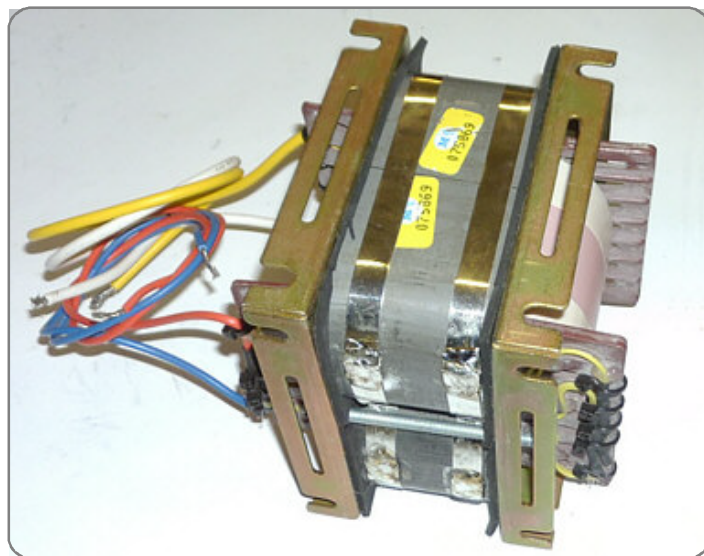


**RoHS COMPLIANT**


**SECONDARY IMPEDANCE 80hm**

CODE	CODICE	PRIMARY IMPEDANCE kOhm	INDUCTANCE at 50Hz - at 1kHz	PRIMARY RESISTANCE	SECONDARY RESISTANCE	PRIMARY CURRENT mA	VOLT (rif. 36VA)	FREQUENCY RANGE	TURN RATIO	SECTIONS
S30W1.7K8		1,7	10 - 50	33	0,2	160	226	20Hz - 30kHz	14,6	7
S30W2.5K8		2,5	12 - 65	48	0,2	130	274	20Hz - 30kHz	17,7	7
S30W3.5K8		3,5	18 - 90	67	0,2	112	324	20Hz - 30kHz	20,94	7
S30W4.5K8		4,5	25 - 110	86	0,2	100	367	20Hz - 30kHz	23,75	7
S30W5.5K8		5,5	30 - 135	105	0,2	90	406	20Hz - 30kHz	26,25	7
S30W6.6K8		6,6	35 - 160	127	0,2	80	445	20Hz - 30kHz	28,75	7
SE30W-8K8		8	40 - 200	154	0,2	75	490	20Hz - 30kHz	31,66	7
SE30W10K8		10	50 - 240	190	0,2	66	548	20Hz - 30kHz	35,32	7
SE30W12K8		12	60 - 280	230	0,2	60	600	20Hz - 30kHz	38,77	7



DIMENSIONS TYPE 1 WEIGHT 3,8Kg

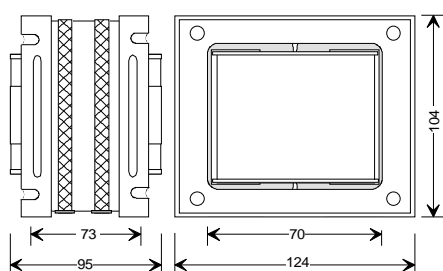


DIMENSIONS TYPE 2 WEIGHT 4,8Kg

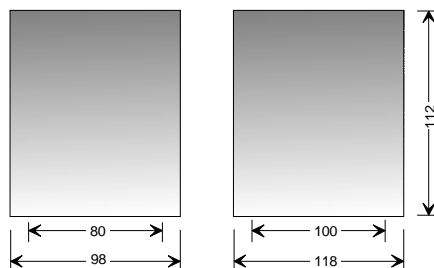

DIMENSIONS TYPE 3 WEIGHT 6,2Kg

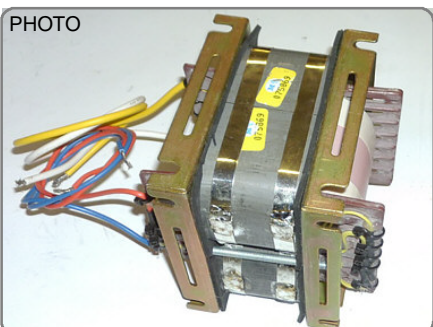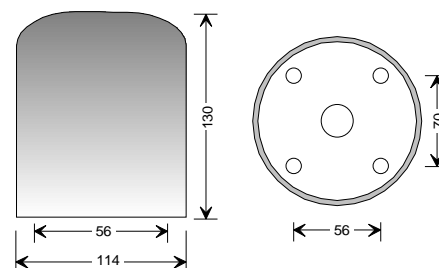

**Euro 146,40 Cad.**

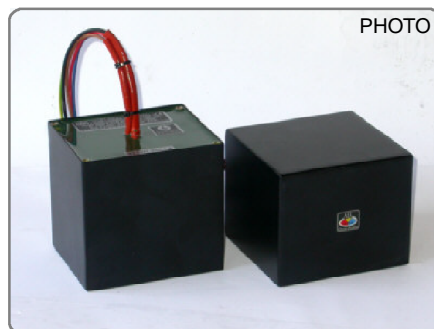

**Euro 176,90**



**Euro 213,50**

I prezzi si intendono iva inclusa, costo fisso spedizione 10,00 Euro (qualsiasi q.tà). Sconti per quantità superiori a 6 pz. per tipo